


# EZ Scratch & Brown w/ Fiber

## Portland Cement Stucco Mix

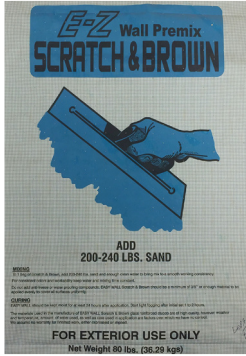

### Description

**EZ Scratch & Brown w/ fiber** is a fiber-reinforced stucco base coat factory prepared blend of portland cement, chopped fibers, and proprietary additives.

**EZ Scratch & Brown w/ fiber** is designed to be mixed with water and sand at the jobsite to create a product that performs like traditional stucco, with enhanced features.

### Advantages

- Fiber - reinforced - minimizes shrinkage and increases resistance to cracking
- Durability - increases flexural strengths
- Economical - facilitates easier transport to job site

### Surface Conditions

All surfaces that receive an application must be clean and free of debris, dirt, dust, efflorescence, grease, oil, curing agents, and cleaning solutions. Damaged surfaces must be repaired and all loose materials removed prior to application.

Metal/Wood Frame Construction - Galvanized diamond metal lath accordance with ASTM C 1063. Wood sheathings must be covered with appropriate layers of grade D building paper.

Note: **EZ Scratch & Brown w/ fiber** meets standards of ASTM C 926.

### Mixing

To each 80 lb. bag of EZ Scratch & Brown w/ fiber

- Add approximately 5 - 7 gallons of clean water
- Add 200 - 250 lbs. of washed plaster sand (Amount of sand added may vary due to moisture) meeting ASTM C 144 or C 897.
- Mix approximately 3 - 5 minutes, **DO NOT** over mix

### Application

EZ Scratch & Brown w/ fiber can be hand troweled or machine sprayed.

- Apply EZ Scratch & Brown w/fiber in accordance with ASTM C 926
- Rod or screed to achieve uniform surface.
- Float the freshly applied EZ Scratch & Brown w/fiber to ensure even suction.

### Coverage

Approximately 27 sq. ft per 80 lb. bag at a 3/4" thickness

Note: Coverage may vary depending on application technique and surface conditions.

### Curing

Curing time may vary due to ambient temperatures, surface temperatures, application methods, and/or thickness of material. (Refer to ASTM C 926 appendix X1. 4. 2. 1). The timing between coats will vary with climatic conditions and types of plaster base. Temperature and relative humidity extend or reduce the time between consecutive operations. Cold or wet weather lengthens and hot or dry weather shortens the time period. Moderate changes in temperature and relative humidity can be overcome by providing additional heating materials during cold weather and by reducing the absorption of the base by pre-wetting during hot or dry weather.

### Cautions and Limitations

**DO NOT** apply product when the ambient and surface temperature are below 40 degrees Fahrenheit or above 120 degrees Fahrenheit.

**DO NOT** add any other materials to the mixture of the product without written approval from EZ Wall Concentrate Inc.

**DO NOT** apply EZ Scratch & Brown w/ fiber if there are contaminants on the receiving surface.

**DO NOT** add any more water than recommended.

**DO NOT** saturate wall during preparation and/or moist curing

**DO NOT** use excessive amounts of water when floating.

**DO NOT** install EZ Scratch & Brown w/ fiber over stucco accessories of joints in construction. Note: Some cracking and efflorescence are inherent in portland cement stucco and should not be viewed as a product defect.

### Storage

An 80 lb. bag should be stored off the ground and protected from moisture, extreme heat, and/or freezing. A 12-month shelf life results if properly stored and sealed.

### Clean Up

Immediately after application clean tools and equipment with water.

### Safety

Avoid contact with the eyes or prolonged contact with skin. **KEEP OUT OF THE REACH OF CHILDREN**

### Warranty

This product is subject to a written and limited warranty which may be obtained free of charge from EZ Wall Concentrate Inc.

EZ Scratch & Brown w/ fiber is to be applied in accordance with all manufacturer's specifications.