

EZ Spread Coarse Sand

Sanded base coat / Finish



Description

EZ Spread is the perfect material for small projects and repairs. This factory prepared blend of portland cement proprietary additives, and sand.

EZ Spread is designed to be mixed with water at the jobsite to create a product that performs like traditional stucco, with enhanced features.

Advantages

- Easy to mix- just add water
- Durability - increases flexural strengths
- Economical - eliminates sand from being transported to the jobsite

Surface Preparation

All surfaces that receive an application must be clean and free of debris, dirt, dust, efflorescence, grease, oils, curing agents, and cleaning solutions. Damaged surfaces must be repaired and all loose materials removed prior to application. Metal/Wood Frame Construction - Galvanized diamond metal lath must be securely attached to construction. Lath must be installed in accordance with ASTM C 1063. Wood sheathings must be covered with appropriate layers of grade D building paper. **EZ Spread** meets the standards of ASTM C 926.

Mixing

To each 90 lb. (approximately) bag of EZ Spread

- Add approximately 5 - 7 gallons of clean water
- Mix for approximately 3 - 5 minutes, DO NOT over mix.

Application (as a base coat)

EZ Spread can be hand troweled or machine sprayed.

- Apply the mixed EZ Spread to a minimum of $\frac{3}{8}$ " thickness on the first pass.
- Second coat can be applied to level out wall to existing areas.

Note: The maximum thickness applied in one pass is $\frac{5}{8}$ ".

Application (as a finish)

Dampen the stucco base to receive finish, but **DO NOT SATURATE**.

Hand Applied: For a float finish, trowel apply the material in an even coat that completely covers the stucco base. Float using a sponge float to achieve a uniform texture. After the first coat had initially set, but before it has completely dried, apply material using a skip trowel method to achieve desired texture.

For a hand textured finish, trowel apply the material in an even coat that completely covers the stucco base. Float using a sponge float to achieve a uniform texture. After the first coat has initially set, but before it has completely dried, apply material using a skip trowel method to achieve desired texture.

Machine Applied: Spray a uniform coat of material over DRY stucco base. Allow first coat of finish to dry completely, and spray another coat of finish if needed to achieve desired texture.

Coverage (as a base coat)

Approximately 18 sq. ft. per 90 lb. bag at $\frac{3}{8}$ " thickness

Approximately 9 sq. ft per 90 lb. bag at $\frac{3}{4}$ "

Note: Coverage will vary depending on application technique and surface conditions.

Curing

Curing time may vary due to ambient temperatures, surface temperature, application methods, and/or thickness of material. (Refer to ASTM C 926 appendix X1.4.2.1)

The timing between coats will vary with climatic conditions and types of plaster base. Temperature and relative humidity extend or reduce the time between consecutive operations. Cold or wet weather lengthens and hot or dry weather shortens the time period. Moderate changes in temperature and relative humidity can be overcome by providing additional heating materials during cold weather and by reducing the absorption of the base pre-wetting during hot or dry weather.

Cautions and Limitations

DO NOT apply product when the ambient and surface temperature are below 40 degrees Fahrenheit or above 120 degrees Fahrenheit

DO NOT add any other materials to the mixture of the product without written approval from EZ Wall Concentrate Inc.

DO NOT apply EZ Spread if there are contaminants on the receiving surface.

DO NOT add any more water than recommended.

DO NOT saturate wall during preparation and/or curing.

DO NOT use excessive water when floating

DO NOT install EZ Spread over stucco accessories of joints in construction

Note: Some cracking and efflorescence are inherent in portland cement stucco and should not be viewed as a product defect.

EZ Spread

Coarse Sand contd.'

Sanded base coat / Finish

Storage

A 90 lb. (approximately) bag should be stored off the ground and protected from moisture, extreme heat, and/or freezing. A 12-month shelf life results if properly stored and sealed.

Clean-Up

Immediately after application clean tools and equipment with water.

Safety

Avoid contact with eyes or prolonged contact with skin.
KEEP OUT OF THE REACH OF CHILDREN.


Warranty

This product is subject to written and limited warranty which may be obtained free of charge from EZ Wall Concentrate Inc.

EZ Spread is to be applied in accordance with all manufacturer's specifications.

EZ Spread_{Fine}

Sanded base coat / Finish

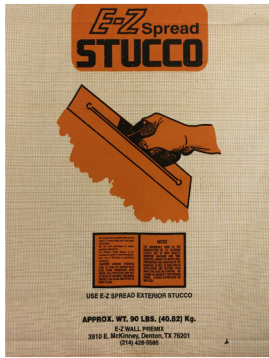

Description

EZ Spread is the perfect material for small projects and repairs. This factory prepared blend of portland cement, proprietary additives, and sand.

EZ Spread is designed to be mixed with water at the jobsite to create a product that performs like traditional stucco, with enhanced features.

Advantages

- i. Easy to mix - just add water
- ii. Durability - increases flexural strengths
- iii. Economical - eliminates sand from being transported to jobsite

Surface Preparation

All surfaces that receive an application must be clean and free of debris, dirt, dust, efflorescence, grease, oils, curing agents, and cleaning solutions. Damaged surfaces must be repaired and all loose materials removed prior to application.

Metal/Wood Frame Construction - Galvanized diamond metal lath must be securely attached to construction. Lath must be installed in accordance with ASTM C 926. Wood sheathings must be covered with appropriate layers of grade D building paper. EZ Spread meets the standards of ASTM C 926.

Mixing

To each 90 lb. (approximately) bag of EZ Spread

- Add approximately 5-7 gallons of clean water
- Mix for approximately 3-5 minutes, DO NOT over mix.

Application (as a base coat)

EZ Spread can be hand troweled or machine sprayed.

- Apply the mixed EZ Spread to a minimum of $\frac{3}{8}$ " thickness
- Second coat can be applied to level out wall to existing areas.

Note : The maximum thickness applied in one pass is $\frac{5}{8}$ ".

Application (as a finish)

Dampen the stucco base to receive finish, but **DO NOT SATURATE.**

Hand Applied: For a float finish, trowel apply the material in an even coat that completely covers the stucco base. Float using a sponge float to achieve a uniform texture. After the first coat had initially set, but before it has completely dried, apply material using a skip trowel method to achieve desired texture.

Coverage (as a base coat)

Approximately 18 sq. ft per 90 lb. bag at $\frac{3}{8}$ " thickness.

Approximately 9 sq. ft per 90 lb. bag at $\frac{3}{4}$ " thickness.

Note: Coverage will vary depending on application technique and surface conditions.

Curing

Curing time may vary due to ambient temperatures, surface temperature, application methods, and/or thickness of material. (Refer to ASTM C 926 appendix X1.4.2.1)

The timing between coats will vary with climatic conditions and types of plaster base. Temperature and relative humidity extend or reduce the time between consecutive operations. Cold or wet weather lengthens and hot or dry weather shortens the time period. Moderate changes in temperature and relative humidity can be overcome by providing additional heating materials during cold weather and by reducing the absorption of the base by pre-wetting during hot or dry weather.

Cautions and Limitations

DO NOT Apply product when the ambient and surface temperature are below 40 degrees Fahrenheit or above 120 degrees Fahrenheit.

DO NOT add any other materials to the mixture of the product without written approval from EZ Wall Concentrate Inc.

DO NOT add any more water than recommended.

DO NOT saturate wall during preparation and/or moist curing.

DO NOT use excessive water when floating.

DO NOT install EZ Spread over stucco accessories or joints in construction.

Note: Some cracking and efflorescence are inherent in portland cement stucco and should not be viewed as a product defect.

Storage

A 90 lb. (approximately) bag should be stored off the ground and protected from moisture, extreme heat, and/or freezing. A 12 month shelf life results if properly stored and sealed.

Clean-Up

Immediately after application clean tools and equipment with water.

EZ Spread

Fine contd.

Sanded base coat / Finish

Safety

Avoid contact with eyes or prolonged contact with skin.
KEEP OUT OF THE REACH OF CHILDREN.

Warranty

This product is subject to a written and limited warranty which may be obtained free of charge from EZ Wall Concentrate Inc. EZ Spread is to be applied in accordance with all manufacturer's specifications.



EZ Spread Coarse & Fine Sand NOTE

EZ Spread Fine / Coarse may be used as a base coat, or a paint grade finish coat.

Application as a finish coat:

Dampen the stucco base to receive finish, but **DO NOT SATURATE.**

Hand Applied: For a float finish, trowel apply the material in an even coat that completely covers the stucco base. Float using a sponge float to achieve a uniform texture. After the first coat had initially set, but before it has completely dried, apply material using a skip trowel method to achieve desired texture.

For a hand textured finish, trowel apply the material in an even coat that completely covers the stucco base. Float using a sponge float to achieve a uniform texture. After the first coat has initially set, but before it has completely dried, apply material using a skip trowel method to achieve desired texture.

Machine Applied: Spray a uniform coat of material over DRY stucco base. Allow first coat of finish to dry completely, and spray another coat of finish if needed to achieve desired texture.

Coverage as a Finish Coat:

Approximately 40 - 80 sq. ft per bag depending on number of coats, texture, and application method.

EZ Spread Coarse is 80 lb. bag

EZ Spread Fine is 90 lb bag